

SELV    

Single Output Industrial DIN RAIL

MODEL	HDR-5U75	HDR-12U75	HDR-24U75	HDR-48U75
OUTPUT VOLTAGE	5V	12V	24V	48V
CURRENT RANGE	0-8 A	0-5 A	0-3.14 A	0-1.57 A

Features:

- Universal AC input 85~264Vac
- Protections: Short circuit / Overload / Over voltage
- Can be installed on DIN rail TS-35/7.5 or 15
- The body width is only 52.5mm
- Isolation class II
- LED indicator for power on
- High reliability
- 3 years warranty
- Compliance to IEC/EN/UL 62368-1

INPUT

INPUT VOLTAGE	85~264Vac 120~370Vdc (Refer to the derating curve of "Loading and Input voltage")
POWER FACTORY	0.6
FREQUENCY RANGE	47~63Hz
EFFICIENCY	85%@5V 88%@12V 90%@24V 91%@48V
AC INPUT CURRENT	≤1.7A@115Vac ≤0.9A@230Vac
AC INRUSH CURRENT	30A@115Vac 60A@230Vac
LEAKAGE CURRENT	≤1mA/240Vac

PROTECTION

OVER LOAD	105%-160% rated power, Protection type: Hiccup mode, recovers automatically after fault condition is removed
SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed
OVER VOLTAGE	Protection type: Shunt down, recovers after repower on

ENVIRONMENT

OPERATING TEMPERATURE	-30°C~+70°C (Refer to the derating curve of "Loading and Ambient temperature")
OPERATING HUMIDITY	20~90%RH non-condensing
STORAGE TEMP., HUMIDITY	-40°C~+85°C 10%~95%RH

WEIGHT & PACKING

MTBF	≥1000Khrs. MIL-HDBK-217F(25°C)
PRODUCT DIMENSION	52.5x90x54.5mm(L*W*H)
NET WEIGHT	0.19KG
QUANTITY/CARTON	60PCS
GROSS WEIGHT	12.4KG

OUTPUT


DC OUTPUT	5V	12V	24V	48V
OUTPUT CURRENT	8A	5A	3.14A	1.57A
RATED POWER	40W	60W	75.36W	75.36W
VOLTAGE TOLERANCE	±2%	±1%	±1%	±1%
VOLTAGE ADJ. RANG	5~5.5V	10.8~13.8V	21.6~28.8V	43.2~57.6V
RIPPLE NOISE	100mV P-P(Max.)			
HOLD UP TIME(Typ.)	30mS/230Vac 7mS/115Vac			

SAFETY & EMC


SAFTY	UL62368-1, EN62368-1, GB4943.1
WITHSTAND VOLTAGE	I/P-O/P: 4KVac;
ISOLATION	100M Ohms/500Vdc/25°C/70%RH

	Parameter	Standard	Test Label/Note
	Conducted emission	BS EN/EN55032(CISPR32), FCC PART 15/CISPR22, GB9254.1	Class B
EMI	Radiated emission	BS EN/EN55032(CISPR32), FCC PART 15/CISPR22, GB9254.1	Class B
	Harmonic current	BS EN/EN61000-3-2, GB17625.1	Class A
	Voltage flicker	BS EN/EN61000-3-3	-----
EMS	BS EN/EN55035		
	Parameter	Standard	Test Label/Note
	ESD	BS EN/EN61000-4-2	Level 4, 8KV air, Level2, 4KV contact, criteria A
	RF field susceptibility	BS EN/EN61000-4-3	Level 3, criteria A
	EFT bursts	BS EN/EN61000-4-4	Level 3, criteria A
	Surge susceptibility	BS EN/EN61000-4-5	Level 3, 1KV/L-N, 2KV/L/N-FG criteria A
	Conducted susceptibility	BS EN/EN61000-4-6	Level 3, criteria A
	Magnetic field immunity	BS EN/EN61000-4-8	Level 4, criteria A
	Voltage dips and interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods

LOADING AND AMBIENT TEMPERATURE

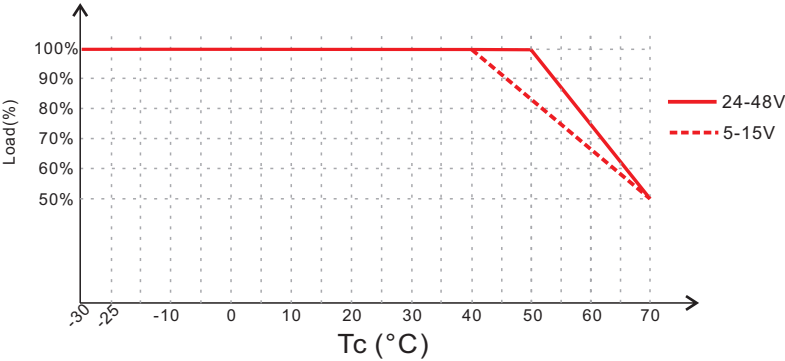


LOADING AND INPUT VOLTAGE

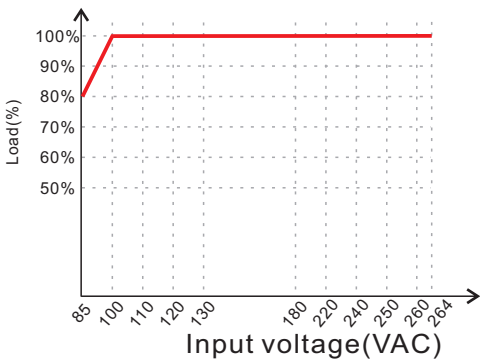


INSTALLATION GUIDE

- Product is for indoor use.**
- The power supply must be grounded before installation and power on.
 - Short circuit or overload will cause power supply protection, resulting in abnormal operation of the load (LED, instrument equipment, etc.).
 - Maintaining good ventilation and heat dissipation is crucial to the lifespan of the power supply. Do not install the product in a sealed high-temperature environment or near flammable and explosive materials. Do not block the power supply vent with foreign objects.
 - The connection line between the power supply and the load should be as short as possible. A connection line that is too long or too thin will cause a voltage drop on the line, resulting in insufficient LED brightness, uneven lighting, etc.
 - The product has low voltage and high current. Be sure to tighten the terminals during installation to avoid heat caused by poor contact.
- When installing the product, try to stay away from environments with relatively high temperatures.

PRODUCT DIMENSIONS

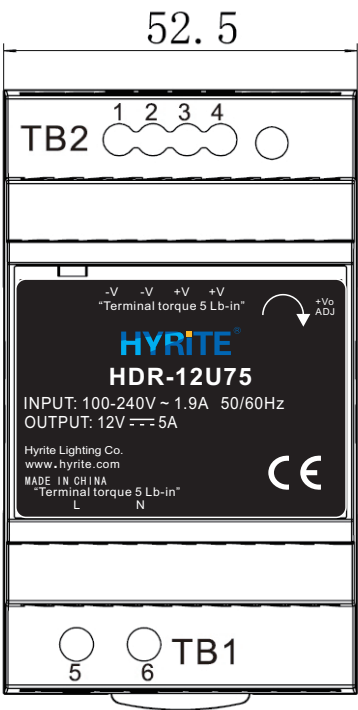

ADJ:
Output adjustable resistor

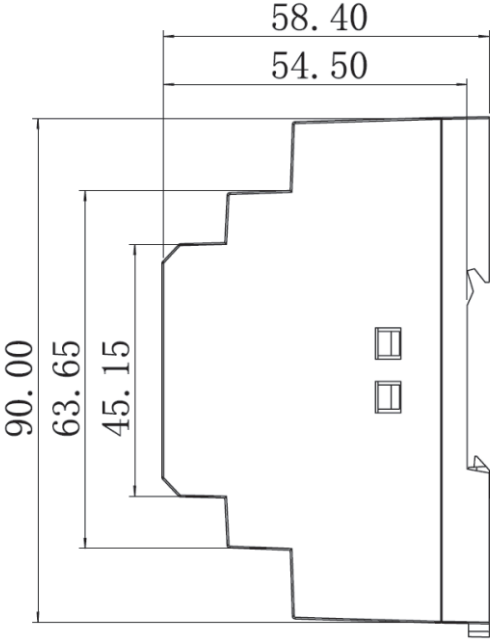

NOTE:
Unit:mm
TOL:±1.00

ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15

Terminal Pin No.Assignment

TB1		TB2	
Pin No.	Assignment	Pin No.	Assignment
5	AC/N	1, 2	DC output -V
6	AC/L	3, 4	DC output +V